


4

Make sure you force the backrest over the small bumps on the left and right leg.
This is a critical point in installation, handle with care!

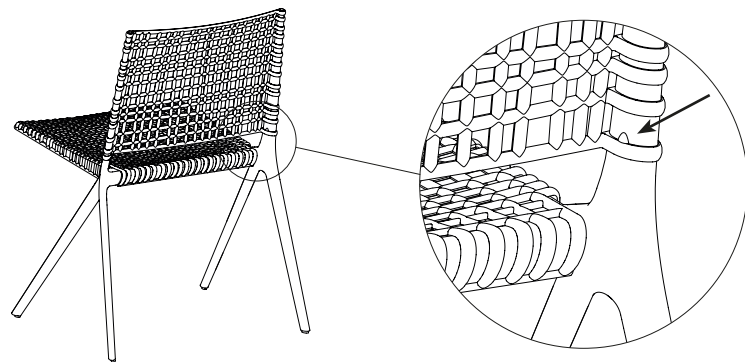

BRBR01 - 13-07-2016

ASSEMBLY INSTRUCTIONS

BRANCH SIDECHAIR / ARMCHAIR BACK REPLACEMENT


07610 / 07618

Tribù nv
Langendijkstraat 5a
3690 Zutendaal
BELGIUM

www.tribu.com
info@tribu.com

TRIBÙ
The art of leisure


CONTENT

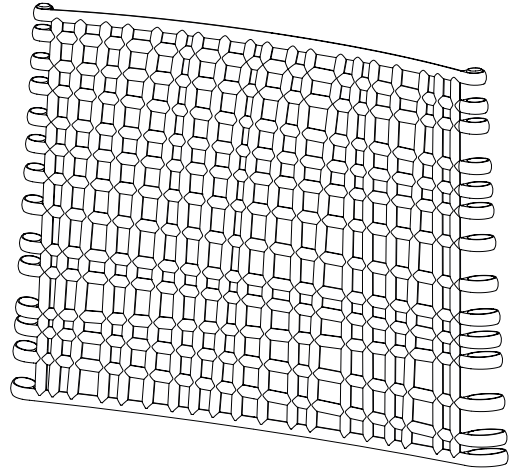


New back

ASSEMBLY INSTRUCTIONS


1 The backrest is held in place by a small bump on the left and right leg. To remove the backrest you have to force it over this bump. Use a hammer if necessary.

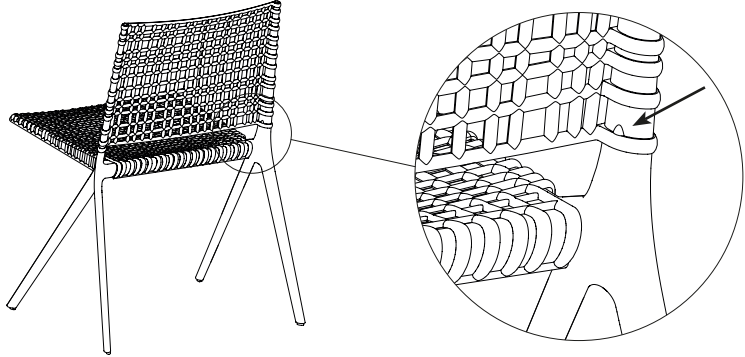

2 Once the backrest is forced over the 2 bumps it is easy to remove.

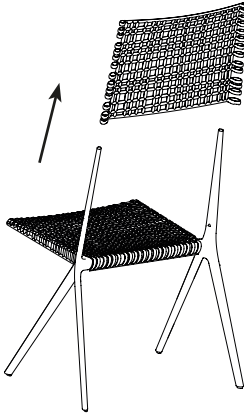

3 Installing the backrest goes a lot better if it has at least room temperature. For example, put it out in the sun for some time.

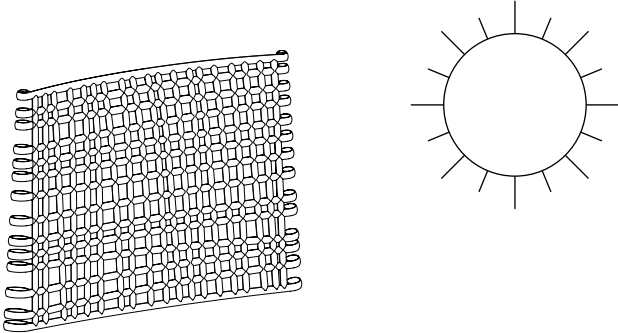

3 To put the new backrest in place you have to bend it a little bit and then slide it over the legs.

